



Product Brochure

Saving Energy Worldwide...one PSI at a time™



Air Knives and Air Nozzles

XE (eXtra Efficiency)

- **Inlet Diameter:** 2" – 3" – 4" – 6"
- **Length:** 2" – 144" (50.8 mm – 3557.6 mm)
- **Material Options:** Aluminum (AL), Stainless Steel (SS), Carbon Steel (CS)
- **Finish Options:** Hard Anodized (HA), Electro-Polish (EP), Zinc & Powder Coat (ZP)

Available With:

- Ferrules
- NPT
- Flexible Nozzles
- Multiple Inlet locations



Static Control with Ionizing Bars

- **Inlet Diameter:** 2" – 3"
- **Length:** 2" – 84" (50.8 mm – 2133.6 mm)
- **Material Options:** Aluminum (AL), Stainless Steel (SS)
- **Includes Anti-Static Ionizing Bars & Power Supply**
- 115 V or 230 V Input/24 V DC Output



Rotary (Patented)

- **Inlet Diameter:** 3" Ferrule with Quick Release Tri-Clamp
- **Length:** 12" – 36" (304.8 mm – 914.4 mm)
- **Material Options:** Stainless Steel (SS), Aluminum with Bolt-on Inlet
- **Rotational Speed:** 10 - 200 RPM (self-propelled)



Nozzles

- **Inlet Diameter:** 2", 3" & 4"
- **Outlet Diameter:** 0.50" – 4.00"
- **Material Options:** Stainless Steel (SS), Rubber, ABS




Sanitary CIP

- **Inlet Diameter:** 3"
- **Length:** 2" – 72" (50.8 mm – 1828.8 mm)
- **Material:** 300 Series Stainless Steel (SS)
- Compliant with 3-A Sanitary Standards for Cleanability



Nozzle Manifolds Made to Order

- **Inlet Diameter:** 4", 6"
- **Length:** 6" – 120" (152.4 mm – 3048 mm)
- **Material Options:** Aluminum Square Tubing w/SS Nozzles
- **Options:** Pneumatic Reciprocation

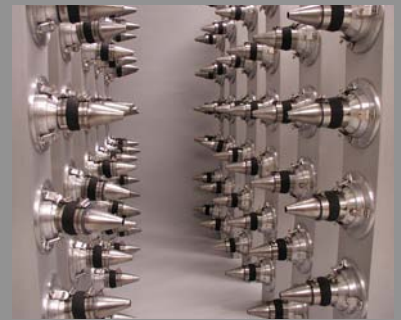

Wire Dryer - Modular

- **Inlet Diameter:** 3" or 4"
- **Wire Diameter:** .01" – 6" (.254 mm – 152.4 mm)
- **Length:** 12" – 24" – 36" (304.8 mm – 609.6 mm – 914.4 mm)
- **Material:** UHMW Enclosure
- **Production Rates:** 100 – 3,000 FPM (30.48 MPM – 914.4 MPM)
- Internal Wire Guides
- **Options:** Pneumatic Opening



Mounting Brackets

- **Material:** Aluminum/ Mounting Blocks w/SS Tubing
- Modular Single Posts for Air Knives, Nozzles or Tubing
- Modular Dual Post for Air Knives, Nozzles or Tubing
- **Optional:** Quick Release Handles



Blowers

SONIC 70 – 150

- **Output Flow Rate:** 50 – 1,100 CFM (1.415 CMM – 31.148 CMM)
- **Pressure:** 0.5 – 4.2 PSIG (3.447 KPA – 28.958 KPA)
- **HP:** 3 – 25 (2.23 kW – 18.64 kW)
- **Dimensions:** 20" – 26" L x 10" – 18" W x 22" – 32" H (508 – 660.4 mm L x 254 – 457.2 mm W x 558.8 – 812.8 mm H)
- **Weight:** 108 lbs – 406 lbs (48.98 – 184.15 kg)
- **Material:** Cast Aluminum
- **Outlet Diameter:** 3" or 4"
- **Voltage:** 190/380 V, 230/460 V, 575 V, 50/60 Hz, 3PH
- 18 Different Blower Outlet Configurations



SONIC 200 – 300 (Dual Blower)

- **Output Flow Rate:** 1,000 – 2,200 CFM (28.316 CMM – 62.297 CMM)
- **Pressure:** 0.5 – 4.2 PSIG (3.447 KPA – 28.958 KPA)
- **HP:** 25 - 50 (18.64 kW – 37.28 kW)
- **Dimensions:** 31" L x 43" W x 18" H (787.4 mm L x 1092.2 mm W x 457.2 mm H)
- **Weight:** 685 lbs (310.71 kg)
- **Material:** Cast Aluminum
- **Outlet Diameter:** 4"
- 11 Different Blower Outlet Configurations




SONIC 350

- **Output Flow Rate:** 1,000 – 3,500 (28.316 CMM – 99.108 CMM) CFM @ 3.5 PSIG (24.131 KPA)
- **HP:** 30 – 50 (22.37 kW – 37.28 kW)
- **Dimensions:** 32" L x 30" W x 60" H (812.8 mm L x 762 mm W x 1524 mm H)
- **Weight:** 1000 lbs (453.59 kg)
- **Material:** Steel
- **Outlet Diameter:** 6"
- 4 Different Blower Outlet Configurations



Hydraulic

- **Output Flow Rate:** 50 – 2,200 CFM (1.415 CMM – 62.297 CMM)
- **Pressure/Vacuum:** 0.5 – 4.2 PSIG (3.447 KPA – 28.958 KPA)
- **HP:** 3 - 50 (2.23 kW – 37.28 kW)
- **Material:** Cast Aluminum
- **Outlet Diameter:** 3", 4" & 6"
- Optional PTO, Engine Drive
- 18 Different Blower Outlet Configurations



Hot Air Tank Dryer (Patented)

- **No Heater or Control Panel Required**
- **Model:** SONIC 70 - 150
- **Material:** SS Enclosure & Piping, Cast Aluminum Blower Body
- **Standard Outlet Temp:** > 160° F (71° C)
- **Optional:** Portable Push Cart
- **Includes:** HEPA Filter and Control Box
- **Energy Reduction:** 50% savings versus Blower with Heater
- Temp Available up to 275° F (135° C)



Variable Temperature (Patented)

- **No Heater or Control Panel Required**
- **Outlet Temp:** 150° F – 275° F (65° C – 135° C)
- **Model:** SONIC 70 - 300
- **HP:** 10 – 50 (7.45 kW – 37.28 kW)
- **Material:** Cast Aluminum Blower
- **Optional:** Water Cooled version 160° F to 275° F (71° C – 135° C)
- **Energy Reduction:** 50% savings versus Blower with Heater



Motor Starters/VFD/Controls

- Use: Magnetic Starters ideal for 3 HP – 7.5 HP (2.23 kW – 5.59 kW) motor protection from Overload
- Soft Starters from 10 HP – 50 HP (7.45 kW – 37.28 kW)
- Optional Pre-wired with Start/Stop 3-wire control and through-the-cover overload RESET.
- Easy to install and setup
- Enclosure NEMA 4X (IP56)



Motor Control Panels

- Includes: Temperature Controller, Run Light, Start/Stop buttons, Temp Fault Light Tower, Main Switch Disconnect
- Power: 190/380 V, 230/460 V, 575 V, 50/60 Hz, 3PH
- NEMA – 5, 4X, 12 (IP52, IP56)
- Option: Variable Frequency Drive



Preventive Maintenance Monitor

- Use: Provides continuous monitoring for any Sonic Blower assembly
- Monitors Blower Bearing temperature to alert high temperatures
- Monitor with two wire transmitter
- Reduces down time and maintenance costs
- 24 V DC or 110 V AC
- LED Controller 1/8 DIN



Water Cooler – Hot Air Blowers (125°F – 400°F)


- **Size:** 4-Gal & 30-Gal (15.14 L – 113.56 L)
- **Material:** Stainless Steel
- **Water Connection:** 5/16"
- **Pump Capacity:** 1.40 GPM
- **Fluid:** Water or Propylene Glycol
- **Power:** 110 V or 230 V @ 1/6 HP 124 W



Accessories

Piping/ Elbows, Reducers & Y-Branches

- **Diameter:** 2" – 3" – 4" – 6"
- **Lengths:** from 6" to 96"
- **Material:** Stainless Steel, Zinc Plated Steel, ABS, & PVC



- **Diameters:** 2" – 3" – 4" – 6"
- **Material:** Stainless Steel, ABS, PVC
- EPDM Sleeve & Clamps
- Reducers
- 45°, 90° Elbows
- Y-Branches
- T-Dividers/Laterals



Manifolds

- **Inlet Diameter:** 4" – 6"
- **Outlet Diameter:** 3" – 4"
- **Material:** Hard Anodized Aluminum, Stainless Steel
- **Models:** 3-Port – 8-port
- **Optional:** Ferrule Connections



Flex Hose

- **Diameter:** 2" – 3" – 4" – 6"
- **Lengths:** 6" – 12ft
- **Material:** Neoprene Coated Fiber Glass Fabric
- **Temp Range:** -65° F – 300° F
- **Max Pressure:** 13 – 30 PSI
- **Options:** Food Grade, High Temp, Tank Dryer



Valves - Butterfly, Check, and Gate

- **Size:** 2" – 3" – 4" – 6"
- **Material:** Anodized Aluminum, Stainless Steel & PVC



Y-Verter - Pneumatic Air Diverter

- **Inlet Diameter:** 4" & 6"
- **Outlet Diameter:** 4" & 6"
- **Material:** Cast Aluminum & SS
- **Response Time:** < 1 Second
- **Max Air Pressure:** 90 PSIG
- **Options:** Solenoid Valve, ByPass Restrictor, ByPass Air Silencer



Enclosures

SONIC 70 – 150 Blowers

- **Outlet Diameter:** 3" & 4"
- **Material:** Stainless Steel (SS)
- **Dimensions:** 33" L x 26" W x 52" H (838.2 mm L x 660.4 mm W x 1320.8 mm H)
- **Filtration:** 1 – 2 Paper or Poly Filters
- **Standard dB Level To:** ≥ 80 dB
- Removable Door for Maintenance
- **Options:** Weatherhoods for Washdown and Outdoor Environments
- For Noise Containment and Protection from Environment
- Additional Sound Reduction Available



SONIC 200 – 300 Dual Blower

- **Outlet Diameter:** 4"
- **Material:** Polypropylene
- **Dimensions:** 38" L x 50" W x 37" H (965.2 mm L x 1270 mm W x 939.8 mm H)
- **Filtration:** 2 – 4 Paper or Polyester Filters
- **dB Level:** ≤ 85 dB
- **Options:** Weatherhoods for Washdown Environment
- For Noise Containment and Protection from Environment



SONIC 350 Blower

- **Outlet Diameter:** 6"
- **Material:** Powder Coated Steel
- **Dimensions:** 51" L x 51" W x 63" H (1295.4 mm L x 1295.4 mm W x 1600.2 mm H)
- **Filtration:** 10 Micron Panel Filters
- **dB Level:** ≤ 85 dB
- For Noise Containment and Protection from Environment



(Air Knife) SmartTunnel™

- **Modular Length:** 24" – 144" (609.6 mm – 3657.6 mm)
- **Inlet Diameter:** 3" – 4"
- **Material:** Stainless Steel (SS)
- Removable Door for Maintenance
- For Noise and Water Containment
- Assembles to Existing Conveyor
- 98% Water Containment
- Noise Reduction to as Low as 80 dB



Filters

Blower Inlet Filter/Silencer

- **Media:** Paper or Polyester (washable)
- **Flow Rate:** 900 CFM, 1200 CFM, 3500 CFM
- **Filtration Level:** 2 – 5 Micron
- **Finish:** Anodized Aluminum, Plated Steel, Stainless Steel
- **Optional:** Analog Gauge



HEPA In-Line

- **Media:** 99.97% @ 0.3 Micron
- **Max Flow Rate:** 1,000 CFM
- **Material:** Aluminum
- **Finish:** Hard Anodized or Nickel Plated
- **Options:** High Temp up to 180° F (82° C), 6" diameter connections and electric gauge
- **Dimensions:** 40" L x 22" Dia x 31" H (1016 mm L x 558.8 mm W x 787.4 mm H)



2-Stage Filter/Silencer

- **Use:** High Dust and Debris Environments
- **1st Stage** – Dual Panel Filter @ 10 Micron
- **2nd Stage** – Cartridge Filter rated to 1,100 CFM @ 2 Micron
- Dual Control Filter Gauge
- Powder Coated CRS
- Optional Pressure Switch
- Optional Metal Mesh Panels for Oil Vapors




COOL AIR – After Cooler

- **Flow Rate:** 100 – 1100 CFM (2.83 CMM – 31.14 CMM)
- **Discharge Air Temp:** 10 – 15° F (5.5 – 8.3° C) above the cooling water inlet temperature
- **Material:** Stainless Steel Case w/Aluminum Cones
- Optional: Nickel Plating
- Fluid Connection: 1" MNPT Pipe Threads





Global Offices

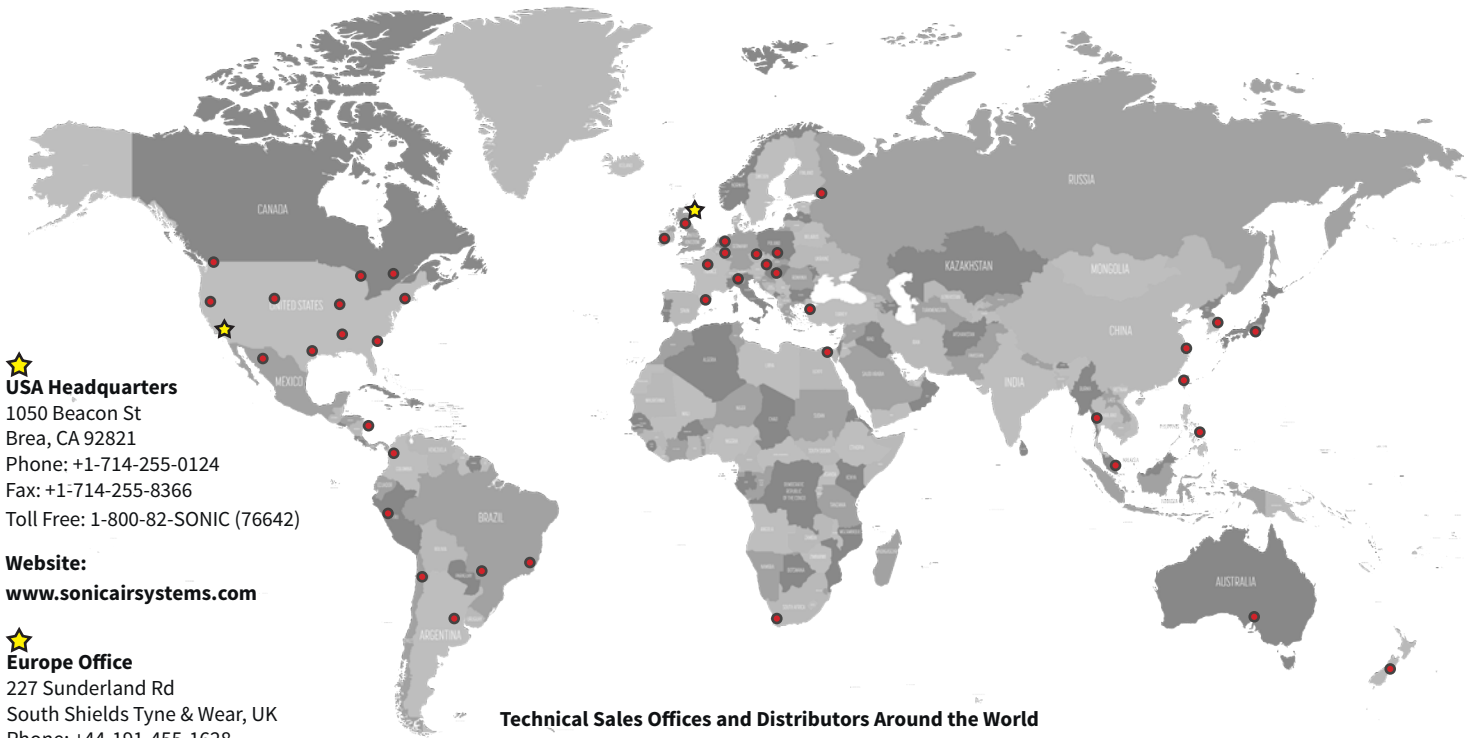

★
USA Headquarters
 1050 Beacon St
 Brea, CA 92821
 Phone: +1-714-255-0124
 Fax: +1-714-255-8366
 Toll Free: 1-800-82-SONIC (76642)

Website:
www.sonicairsystems.com

★
Europe Office
 227 Sunderland Rd
 South Shields Tyne & Wear, UK
 Phone: +44-191-455-1628

Technical Sales Offices and Distributors Around the World

Email:
asksonic@sonicairsystems.com

Provided Engineered Air Solutions Around the World for:

Abbott Laboratories
 AmBev
 Arcelor Mittal
 Benchmark Electronics
 Bimbo Bakeries
 Boston Beer Co
 Bridgestone Firestone
 Certainteed Corp
 China Steel Aluminum Corp
 Coca Cola
 CommScope Cable
 Danone Foods
 Diageo
 Dominos Pizza
 Dr Pepper Snapple Group
 Essilor of America
 EJ Gallo

First Solar
 Ford Motor Co
 Foxxconn
 Frito Lay
 GAF Corp
 General Motors
 Givaudan
 Grupo Jumex
 Grupo Modelo
 Hershey
 Honda of North America
 Innoprint Chile
 Jabil Circuits
 James Hardie Industries
 JP Steel Plantech
 Kellogg's
 KHS

Kirwan Surgical
 Kraft Foods
 Kroger Foods
 Kumho Tire
 Leprino Cheese
 Louisiana Pacific
 Magna Corp
 Marine Spill Response Corp
 Michelin Tire
 Miller Coors
 Mission Produce
 Mondelez
 Nestle
 Nippon Steel
 NLMK
 Norbord
 The Okonite Company

Penhall Co
 Pepsi Bottling
 Refresco
 St Mary's Cement
 Steel Dynamics
 Thyssenkrupp Steel
 Timken Bearings
 Titleist
 Transitions Optical
 US Steel
 Vascular Technologies
 Waupaca Foundries
 Weyerhaeuser
 Whirlpool
 Yokohama Tire
 Zekelman Industries
 Zeon Chemicals